

NG760 Low Loss

Features:
* Low Insertion Loss

Applications:
* Telecom
* Interconnection between equipment

Electrical

Frequency:	DC~18GHz
Cut-off Frequency:	19GHz
Impedance:	50
Velocity of Propagation:	83%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	3000V DC
Voltage Withstand:	3000V DC


Mechanical

Bend Radius (installation):	39.0mm
Bend Radius (repeated):	80.0mm
Weight:	134g/m

Environmental

Temperature: -55~+165C

Construction

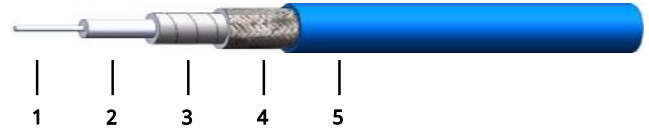

No.	Name	Size (mm)	Material
1	Inner Conductor	2.30	Silver-plated copper
2	Dielectric	6.25	Low density PTFE
3	Inner Shield	6.50	Self-adhesive aluminum foil
4	Outer Shield	6.90	Silver-plated copper braid
5	Jacket	7.60	FEP

Attenuation & Power Handling

Frequency (GHz)	0.3	0.5	1	3	6	10	12.4	18
Attenuation*1 (dB/100m)	8.0	10.5	15.1	27.3	40.1	53.8	61.0	76.3
Average Power*2 (W)	3141	2409	1754	814	573	495	383	358

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = $0.448000 \times \sqrt{F} \text{ (MHz)} + 0.000898 \times F \text{ (MHz)}$

Calculate Connector Attenuation: Attenuation (dB) = $0.03 \times \sqrt{F} \text{ (GHz)}$

How To Order

NG760-X-Y-Z
X: Frequency in GHz
Y: Connector type
Z: Length in meters

Examples:

To order a NG800 cable assembly, DC-18GHz, N male to N female, 0.5 meter, specify NG760-18-NNF-0.5.

Connector naming rules:

S - SMA (18GHz, VSWR 1.25)
N - N (18GHz, VSWR 1.25)
T - TNC (18GHz, VSWR 1.25)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)