

## NMS22

### DC~50GHz, SPDT

Features:  
 \* Low VSWR  
 \* Low Insertion Loss  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency: DC~50GHz  
 Impedance: 50Ω

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
DC~6	0.2	70	1.2
6~12	0.3	70	1.3
12~18	0.4	60	1.4
18~26.5	0.6	55	1.6
26.5~32	0.7	50	1.7
32~40	0.8	50	1.8
40~50	0.9	45	1.9

Voltage*1 (V)	Current (mA)	Failsafe	Latching
+12	195	100	95
+24	100	140	120
+28	95	120	

[1]The voltage can be selected according to user requirements.


### Mechanical

Switching Sequence: Break before Make  
 Switching Time: 15mS max.  
 Operation Life: 2M Cycles  
 Vibration (operating): 20-2000Hz, 10G RMS  
 Mechanical Shock (non-operating): 30G, 1/2sine, 11mS  
 RF Connectors: 2.4mm Female  
 Power Supply & Control Interface Connectors: Feed Through/Terminal Post  
 Mounting: 2-Φ3mm through-hole

### Environmental

Temperature: -25~+65°C  
 Extended Temperature: -45~+85°C

### Outline Drawings

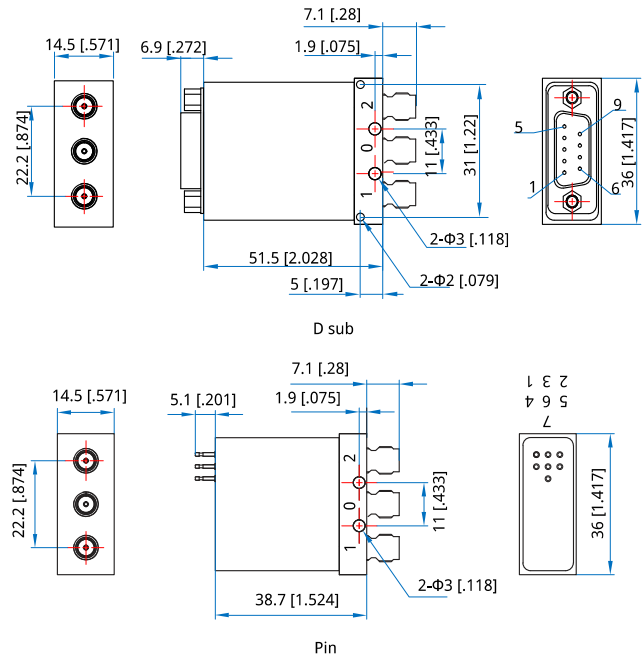

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

### Additional Options

TTL: T  
 Indicators: I  
 Extended Temperature: Z  
 Positive Common  
 Waterproof Sealing Type

### How To Order

**NMS22-F-WXYZ**

F: Frequency in GHz  
 W: Actuator Type. Failsafe: 0, Latching: 1.  
 X: Voltage. +12V: E, +24V: K, +28V: M.  
 Y: Power Interface. Pin: 0  
 Z: Additional Options.

Examples:

To order a SPDT switch, DC-50GHz, Failsafe, +12V, Pin, TTL, specify NMS22-50-0E0T.

Customization is available upon request.

### Pin Numbering

#### Failsafe

Pin	Function	Pin	Function
1	VDC(RF: 0 to 2)	4~5	Indicator (1~2)
2	NC	6	Indicator (COM)
3	COM(RF: 0 to 2)	7~9	NC

#### Failsafe&TTL

Pin	Function	Pin	Function
1	VDC(RF: 0 to 2)	4~5	Indicator (1~2)
2	A1(RF: 0 to 2)	6	Indicator (COM)
3	COM(RF: 0 to 2)	7~9	NC

#### Latching

Pin	Function	Pin	Function
1	V1(RF: 0 to 1)	4~5	Indicator (1~2)
2	V2(RF: 0 to 2)	6	Indicator (COM)
3	COM	7~9	NC

#### Latching&TTL

Pin	Function	Pin	Function
1	VDC	5~6	Indicator (1~2)
2	A1(RF: 0 to 1)	7	Indicator (COM)
3	COM	8~9	NC
4	A2(RF: 0 to 2)		

### Driving Schematic Diagram

