

## NPD3-440-900-60-N

3-Way, 0.44~0.9GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	0.44~0.9GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	60W max. 6W max. as combiner

**Mechanical**


Size*1:	100*100*20mm 3.937*3.937*0.866in
Weight:	700g
Connectors:	N Female
Mounting:	4-Φ4.5mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature: -35~+75°C

**Outline Drawings**

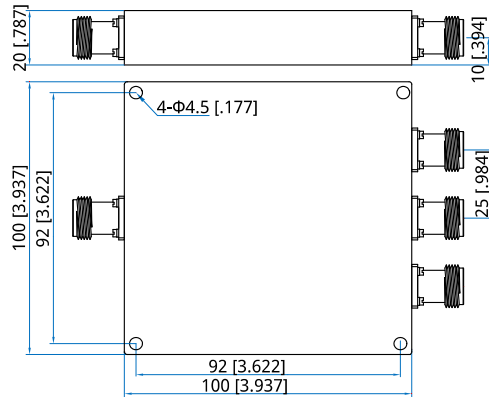

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**NPD3-440-900-60-N**

Customization is available upon request.