

NPD3-500-8000-20-S

3-Way, 0.5~8GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~8GHz
Insertion Loss:	2.2dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	17dB min.
Amplitude Balance:	1dB max.
Phase Balance:	±10°
Impedance:	50Ω
Average Power:	20W max. 2W max. as combiner

Mechanical


Size ^{*1} :	160*52*12mm 6.299*2.047*0.472in
Weight:	255g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

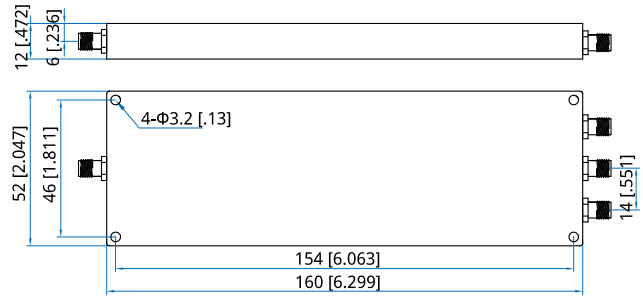

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NPD3-500-8000-20-S

Customization is available upon request.