

NPD6-2000-18000-20-S

6-Way, 2~18GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	2~18GHz
Insertion Loss:	2.6dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±0.6dB
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

Mechanical


Size*1:	109*76*10mm 4.291*2.992*0.394in
Weight:	300g
Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

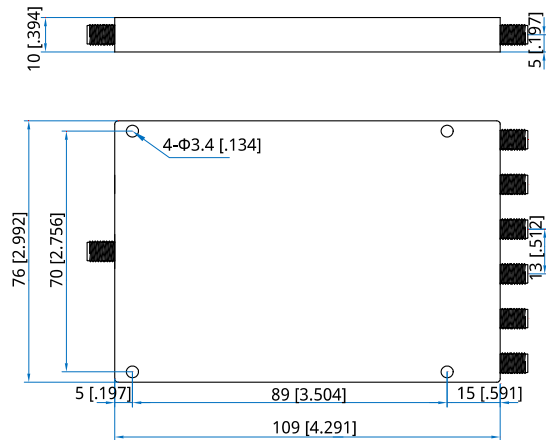

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

NPD6-2000-18000-20-S

Customization is available upon request.