

NWSS-34

WR-34

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 21.7~33GHz
 VSWR: 1.08 max.
 Insertion Loss: 0.1 max.

Mechanical

Length: 0.03m
 1.181in
 Waveguide size: WR-34 (BJ260)
 Flange: FBP260
 Material: Aluminum Alloy

How To Order

NWSS-34-X-Y-Z

X: Length
 Y: Material
 Z: Flange type

Length in mm:
 30 - 30mm (Outline A, B)

Material naming rules:
 A - Aluminum (Outline A, B)


Flange naming rules:
 1 - FBP (Outline A, B)

01- Outline A
 02- Outline B


Examples:
 To order a waveguide straight section, WR-34, 30mm, Aluminum, FBP260, Outline A, specify NWSS-34-30-A-1-01.

Customization is available upon request.

Outline Drawings

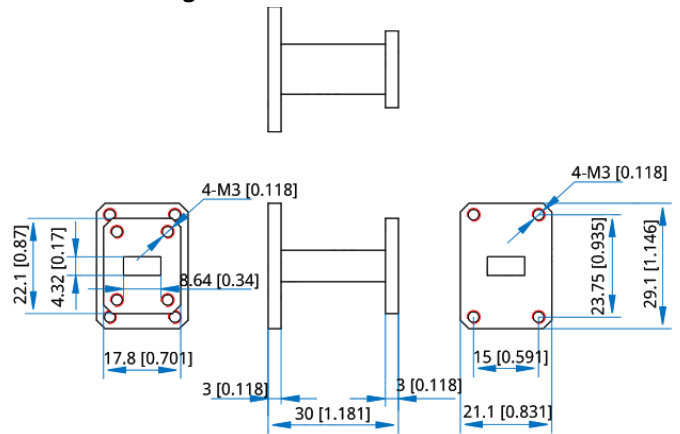

Outline A

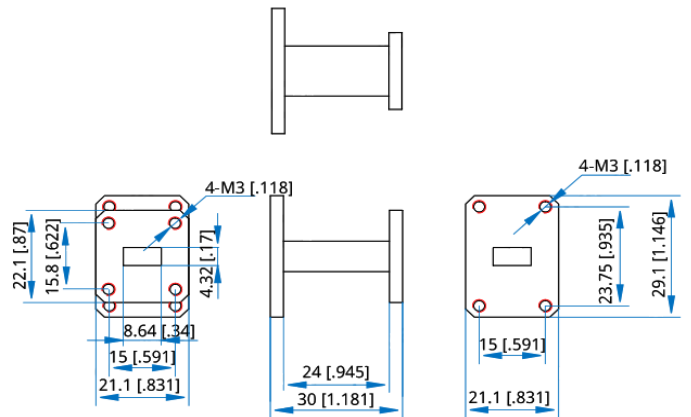

Outline B

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]