

NWSS-D350

WRD350

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.5~8.2GHz
VSWR:	1.1 max.
Insertion Loss:	0.1dB max.

Mechanical

Length:	100mm 3.937in
Waveguide size:	WRD350
Flange:	FPWRD350
Material:	Aluminum
Surface Treatment:	Conductive oxidation
Coating:	Black paint

How To Order

NWSS-D350-X-Y-Z

X: Length

Y: Material

Z: Flange type

Length in mm:

100 - 100mm (Outline A)

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


8 - FPWRD (Outline A)

Examples:

To order a waveguide straight section, WRD350, 100mm, Aluminum, FPWRD350, specify NWSS-D350-100-A-8.

Customization is available upon request.

Outline Drawings

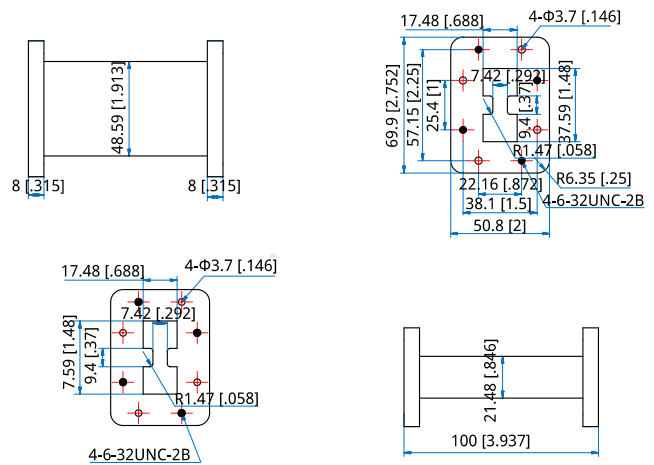

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]