

NWSS-D750

WRD750

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 7.5~18GHz
 VSWR: 1.1 max.
 Insertion Loss: 0.1dB max.

Mechanical

Length: 100mm
 3.937in
 Waveguide size: WRD750
 Flange: FPWRD750
 Material: Aluminum
 Surface Treatment: Conductive oxidation
 Coating: Black paint

How To Order

NWSS-D750-X-Y-Z

X: Length
 Y: Material
 Z: Flange type

Length in mm:
 100 - 100mm (Outline A)


Material naming rules:
 A - Aluminum (Outline A)

Flange naming rules:
 8 - FPWRD (Outline A)

Examples:
 To order a waveguide straight section, WRD750, 100mm,
 Aluminum, FPWRD750, specify NWSS-D750-100-A-8.

Customization is available upon request.

Outline Drawings

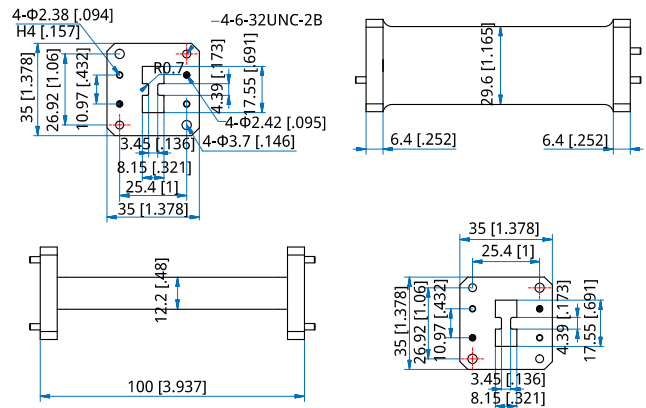

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]