

# NBF-10200-12300-90

10.2~12.3GHz, 90dB

- |   |  |
|---|--|
| <b>Features:</b><br>* High Stopband Rejection<br>* Small Size | <b>Applications:</b><br>* Telecom<br>* Laboratory Test<br>* Receivers<br>* Instrumentation |
|---|--|

## Electrical

Passband:	10.2~12.3GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	90dBc@DC~7.5GHz min. 90dBc@15.52~20GHz min.


## Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

## Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

## Outline Drawings

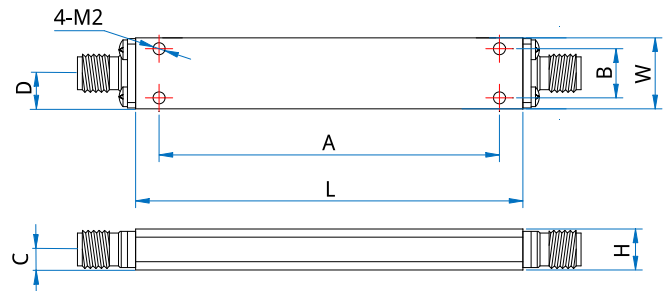

Size	L	W	H	A	B	C	D
mm	54	15	9	45.4	8.5	4.5	8
in	2.126	0.591	0.354	1.787	0.335	0.177	0.315

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

## How To Order

[NBF-10200-12300-90](#)

Customization is available upon request.