

NBT-18000-40000
18~40GHz

Features:
* Broadband
* Small Size

Applications:
* Telecom
* Satcom
* Laboratory Test
* Instrumentation

Electrical

Frequency: 18~40GHz
Insertion Loss: 2dB max.
VSWR: 2 max.
Voltage: +10V DC
Current: 0.3A

Mechanical


Size*1: 15*16*9mm
0.591*0.63*0.354in
RF In Connector: 2.92mm male
RF Out Connector: 2.92mm female
Power Supply & Control Interface: Solder Pin & Terminal Post
RF Input Connector: DC & RF
Mounting: 2-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C
Non-operating Temperature: -55~+85°C

Outline Drawings

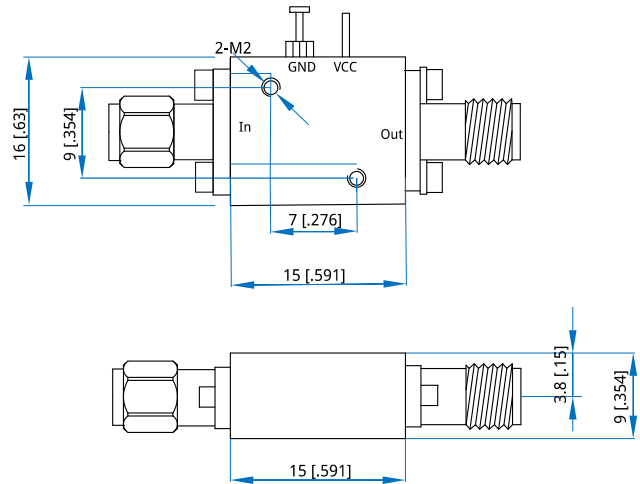

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order
NBT-18000-40000

Customization is available upon request.