

NBT-24900-25100

24.9~25.1GHz

Features:
* Broadband
* Small Size

Applications:
* Telecom
* Satcom
* Laboratory Test
* Instrumentation

Electrical

Frequency Range: 24.9~25.1GHz
 Insertion Loss: 0.8dB max.
 VSWR: 2 max.
 Voltage: +9~+30V
 Current: 0.03A@30V
 0.11A@9V
 RF Input Power: 2W max.

Mechanical


Size*1: 15*13*9mm
 0.591*0.512*0.354in
 Weight: 60g max.
 Connectors: 2.92mm Female
 DC Connectors: Solder Pin & Terminal Post
 IN: DC & RF
 OUT: RF

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C
 Non-operating Temperature: -55~+85°C

Outline Drawings

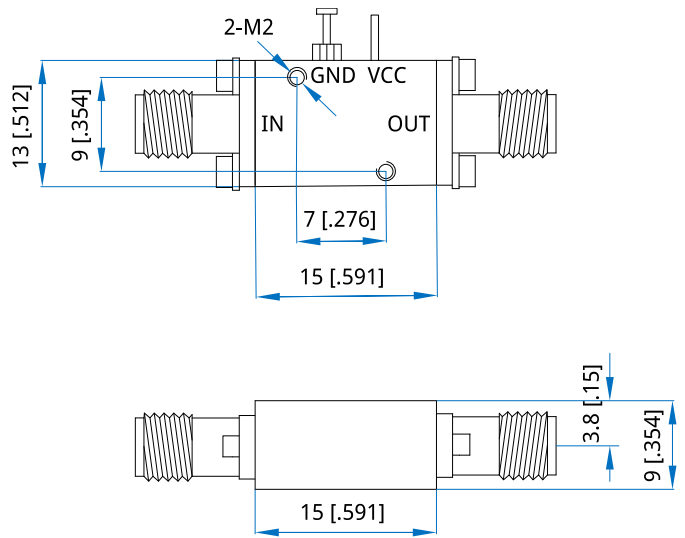

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NBT-24900-25100

Customization is available upon request.