

# NBTP-200-12000-S

High Power, 0.2~12GHz

Features:  
 \* Broadband  
 \* Small Size

Applications:  
 \* Telecom  
 \* Satcom  
 \* Laboratory Test  
 \* Instrumentation

## Electrical

Frequency:	0.2~12GHz
Insertion Loss:	0.6dB max.
VSWR:	1.8 max.
Voltage:	0~36V DC
Current:	0.14A @36V
RF Input Power:	10W max.

## Mechanical


Size <sup>*1</sup> :	30*20*12mm 1.181*0.787*0.472in
RF Connectors:	SMA
Power Supply &	
Control Interface:	Solder Pin & Terminal Post
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

## Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

## Outline Drawings

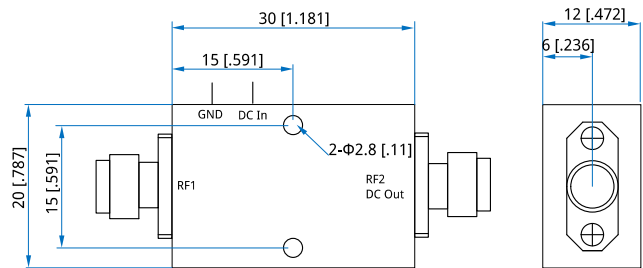

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

## How To Order

**NBTP-200-12000-S**

Customization is available upon request.