

NBTP-5-700-S

High Power, 0.005~0.7GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical

| | |
|-----------------|--------------|
| Frequency: | 0.005~0.7GHz |
| Insertion Loss: | 0.5dB max. |
| VSWR: | 1.8 max. |
| Voltage: | 0~48V DC |
| Current: | 3.13A@48V |
| RF Input Power: | 150W max. |

Mechanical


| | |
|-----------------------------------|-----------------------------------|
| Size ^{*1} : | 40*20*13mm 1.575*0.787*0.512in |
| RF Connectors: | SMA |
| Power Supply & Control Interface: | Solder Pin & Terminal Post |
| Mounting: | 4-Φ2.7mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Outline Drawings

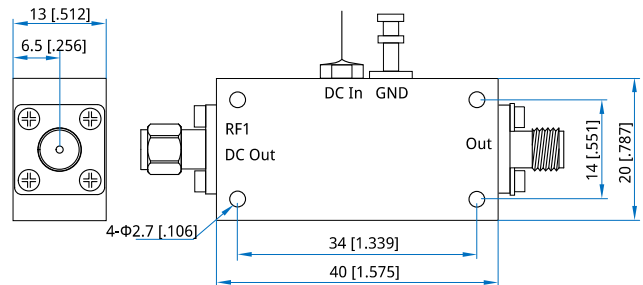

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NBTP-5-700-S

Customization is available upon request.