


NAM0-40-U
Long Flex Life

Features:
* Long Flex Life
* High Durable

Applications:
* Laboratory Test
* Satellite Communication

Construction

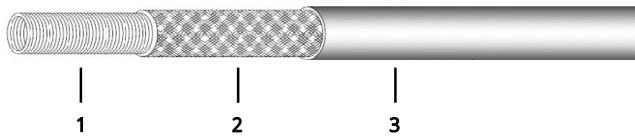

No.	Name	Size (mm)	Material
1	Spring	5.0±0.1	Stainless Steel Wire
2	Outer Conductor	5.6±0.1	Tin Plated Braid
3	Jacket	7.0±0.15	PUR

Environmental

Temperature: -40~+80°C
Water Proof: Yes
Oil Proof: Yes

Mechanical

Bend Radius (installation): 30mm
Bend Radius (repeated): 80mm
Spring Spiral Direction: Right
Spring Zero Load Pitch: 0.5mm
Spring Wire Diameter: 0.5±0.05mm
Spring Inner Diameter: 4.0±0.1mm
Outer Conductor Coverage: 90% min.
Rate:
Jacket Color: Blue

How To Order

NAM0-40-U-X

X: Length in meters

Examples:

To order a NAM0-40-U RF cable armor, 0.5 meter, specify NAM0-40-U-0.5female, 0.5 meter, specify NE086-18-SSF-0.5.