


### NAMO-54-P

Long Flex Life

Features:  
 \* Long Flex Life  
 \* High Durable

Applications:  
 \* Laboratory Test  
 \* Satellite Communication

#### Construction

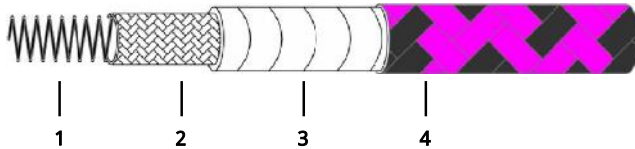

No.	Name	Size (mm)	Material
1	Spring	6.40±0.1	Stainless Steel Wire
2	Outer Conductor	6.90±0.1	Tin Plated Braid
3	Inner Jacket	7.15±0.1	PTFE
4	Jacket	7.55±0.15	PTFE

#### Environmental

Temperature: -40~+165°C  
 Water Proof: No  
 Oil Proof: No

#### Mechanical

Bend Radius (installation): 30mm  
 Bend Radius (repeated): 80mm  
 Spring Spiral Direction: Right  
 Spring Zero Load Pitch: 0.7mm  
 Spring Wire Diameter: 0.5±0.05mm  
 Spring Inner Diameter: 5.4±0.1mm  
 Outer Conductor Coverage: 90% min.  
 Rate:  
 Inner Jacket Color: White  
 Jacket Color: Purple and Black

#### How To Order

**NAMO-54-P-X**  
 X: Length in meters

Examples:

To order a NAMO-54-P RF cable armor, 0.5 meter, specify NAMO-54-P-0.5.