

### NAMO-62-N

#### Long Flex Life


**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**

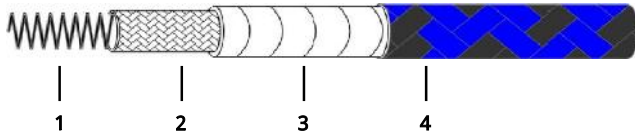

No.	Name	Size (mm)	Material
1	Spring	7.70±0.1	Stainless Steel Wire
2	Outer Conductor	8.30±0.1	Tin Plated Braid
3	Inner Jacket	8.80±0.1	PTFE
4	Jacket	9.60±0.15	Nylon

**Environmental**

Temperature:	-40~+105°C
Water Proof:	No
Oil Proof:	No

**Mechanical**

Bend Radius (installation):	50mm
Bend Radius (repeated):	100mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	1.2~1.5mm
Spring Wire Diameter:	0.70±0.1mm
Spring Inner Diameter:	6.20±0.1mm
Outer Conductor Coverage Rate:	90% min.
Inner Jacket Color:	White
Jacket Color:	Blue and Black

**How To Order**

**NAMO-62-N-X**

X: Length in meters

**Examples:**

To order a NAMO-62-N RF cable armor, 0.5 meter, specify NAMO-62-N-0.5.