


NAMO-62-P

Long Flex Life

Features:
 * Long Flex Life
 * High Durable

Applications:
 * Laboratory Test
 * Satellite Communication

Construction

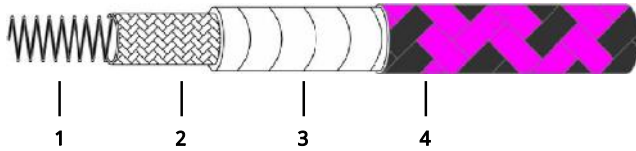

No.	Name	Size (mm)	Material
1	Spring	7.70±0.1	Stainless Steel Wire
2	Outer Conductor	8.30±0.1	Tin Plated Braid
3	Inner Jacket	8.75±0.1	PTFE
4	Jacket	9.15±0.15	PTFE

Environmental

Temperature: -40~+165°C
 Water Proof: No
 Oil Proof: No

Mechanical

Bend Radius (installation): 50mm
 Bend Radius (repeated): 100mm
 Spring Spiral Direction: Right
 Spring Zero Load Pitch: 1.0mm
 Spring Wire Diameter: 0.7±0.05mm
 Spring Inner Diameter: 6.20±0.1mm
 Outer Conductor Coverage: 90% min.
 Rate:
 Inner Jacket Color: White
 Jacket Color: Purple and Black

How To Order

NAMO-62-P-X
 X: Length in meters

Examples:

To order a NAMO-62-P RF cable armor, 0.5 meter,
 specify NAMO-62-P-0.5