

NAM0-62-U
Long Flex Life


Features:

- * Long Flex Life
- * High Durable

Applications:

- * Laboratory Test
- * Satellite Communication

Construction

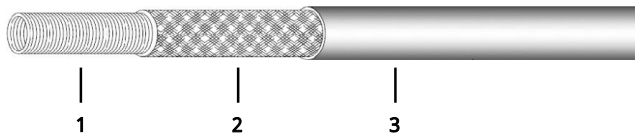

| No. | Name | Size (mm) | Material |
|-----|-----------------|-----------|----------------------|
| 1 | Spring | 7.7±0.1 | Stainless Steel Wire |
| 2 | Outer Conductor | 8.3±0.1 | Tin Plated Braid |
| 3 | Jacket | 10.1±0.15 | PUR |

Environmental

- Temperature: -40~+80°C
- Water Proof: Yes
- Oil Proof: Yes

Mechanical

- Bend Radius (installation): 50mm
- Bend Radius (repeated): 100mm
- Spring Spiral Direction: Right
- Spring Zero Load Pitch: 1.0~1.2mm
- Spring Wire Diameter: 0.7±0.05mm
- Spring Inner Diameter: 6.2±0.1mm
- Outer Conductor Coverage: 90% min.
- Rate:
- Jacket Color: Blue

How To Order

NAM0-62-U-X

X: Length in meters

Examples:

To order a NAM0-62-U RF cable armor, 0.5 meter, specify NAM0-62-U-0.5..