

### NAMO-80-N

#### Long Flex Life


**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**

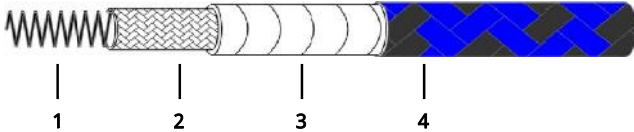

No.	Name	Size (mm)	Material
1	Spring	10.5±0.1	Stainless Steel Wire
2	Outer Conductor	11.1±0.1	Tin Plated Braid
3	Inner Jacket	11.35±0.1	PTFE
4	Jacket	12.2±0.15	Nylon

**Environmental**

Temperature: -40~+105°C  
 Water Proof: No  
 Oil Proof: No

**Mechanical**

Bend Radius (installation): 60mm  
 Bend Radius (repeated): 120mm  
 Spring Spiral Direction: Right  
 Spring Zero Load Pitch: 1.5~2.0mm  
 Spring Wire Diameter: 1.20±0.1mm  
 Spring Inner Diameter: 8.00±0.1mm  
 Outer Conductor Coverage: 90% min.  
 Rate:  
 Inner Jacket Color: White  
 Jacket Color: Blue and Black

**How To Order**

**NAMO-80-N-X**  
 X: Length in meters

**Examples:**

To order a NAMO-80-N RF cable armor, 0.5 meter, specify NAMO-80-N-0.5.