

**NAM0-85-P**  
Long Flex Life


Features:

- \* Long Flex Life
- \* High Durable

Applications:

- \* Laboratory Test
- \* Satellite Communication

**Construction**

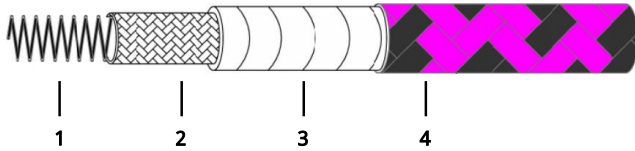

| No. | Name            | Size (mm) | Material             |
|-----|-----------------|-----------|----------------------|
| 1   | Spring          | 10.90±0.1 | Stainless Steel Wire |
| 2   | Outer Conductor | 11.50±0.1 | Tin Plated Braid     |
| 3   | Inner Jacket    | 12.0±0.1  | PTFE                 |
| 4   | Jacket          | 12.5±0.15 | PTFE                 |

**Environmental**

- Temperature: -40~+165°C
- Water Proof: No
- Oil Proof: No

**Mechanical**

- Bend Radius (installation): 60mm
- Bend Radius (repeated): 120mm
- Spring Spiral Direction: Right
- Spring Zero Load Pitch: 2.0mm
- Spring Wire Diameter: 1.2±0.05mm
- Spring Inner Diameter: 8.5±0.1mm
- Outer Conductor Coverage Rate: 90% min.
- Inner Jacket Color: White
- Jacket Color: Purple and Black

**How To Order**

**NAM0-85-P-X**

X: Length in meters

Examples:

To order a NAM0-85-P RF cable armor, 0.5 meter, specify NAM0-85-P-0.5.