

### NAM1-22-P

#### Long Flex Life


**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**

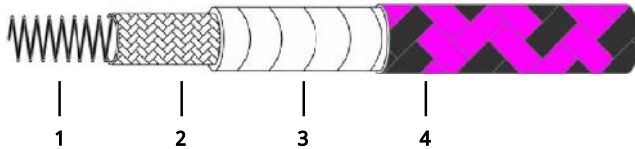

No.	Name	Size (mm)	Material
1	Spring	3.0±0.1	Stainless Steel Strap
2	Outer Conductor	3.35±0.1	Tin Plated Braid
3	Inner Jacket	3.6±0.1	PTFE
4	Jacket	4.7±0.15	PTFE

**Environmental**

- Temperature: -40~+80°C
- Water Proof: No
- Oil Proof: No

**Mechanical**

- Bend Radius (installation): 30mm
- Bend Radius (repeated): 80mm
- Spring Spiral Direction: Right
- Spring Zero Load Pitch: 1.0~1.5mm
- Spring Wire Size: 1.5±0.15\*0.4±0.01mm
- Spring Inner Diameter: 2.20±0.1mm
- Outer Conductor Coverage: 90% min.
- Rate:
- Inner Jacket Color: White
- Jacket Color: Purple and Black

**How To Order**

**NAM0-22-P-X**  
 X: Length in meters

**Examples:**

To order a NAM1-22-P RF cable armor, 0.5 meter, specify NAM1-22-P-0.5.