


NAM1-22-P
Long Flex Life

Features:
* Long Flex Life
* High Durable

Applications:
* Laboratory Test
* Satellite Communication

Construction

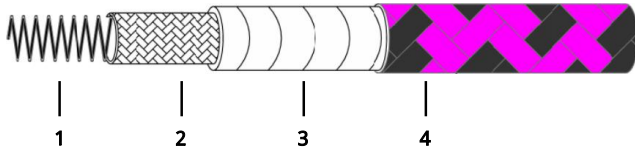

No.	Name	Size (mm)	Material
1	Spring	3.0±0.1	Stainless Steel Strap
2	Outer Conductor	3.35±0.1	Tin Plated Braid
3	Inner Jacket	3.6±0.1	PTFE
4	Jacket	4.7±0.15	PTFE

Environmental

Temperature: -40~+80°C
Water Proof: No
Oil Proof: No

Mechanical

Bend Radius (installation): 30mm
Bend Radius (repeated): 80mm
Spring Spiral Direction: Right
Spring Zero Load Pitch: 1.0~1.5mm
Spring Wire Size: 1.5±0.15*0.4±0.01mm
Spring Inner Diameter: 2.20±0.1mm
Outer Conductor Coverage: 90% min.
Rate:
Inner Jacket Color: White
Jacket Color: Purple and Black

How To Order

NAM1-22-P-X

X: Length in meters

Examples:

To order a NAM1-22-P RF cable armor, 0.5 meter, specify NAM1-22-P-0.5.