

### NAM1-40-P

#### Long Flex Life


**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**

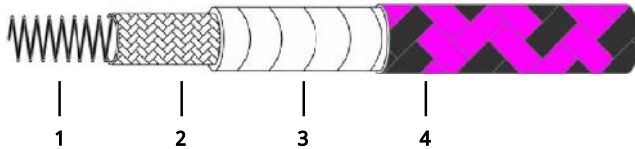

No.	Name	Size (mm)	Material
1	Spring	4.95±0.1	Stainless Steel Strap
2	Outer Conductor	5.20±0.1	Tin Plated Braid
3	Inner Jacket	5.50±0.1	PTFE
4	Jacket	6.0±0.15	PTFE

**Environmental**

Temperature:	-40~+165°C
Water Proof:	No
Oil Proof:	No

**Mechanical**

Bend Radius (installation):	30mm
Bend Radius (repeated):	60mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	0.5mm
Spring Wire Size:	1.5*0.40mm
Spring Inner Diameter:	4.00±0.1mm
Outer Conductor Coverage Rate:	90% min.
Inner Jacket Color:	White
Jacket Color:	Purple and Black

**How To Order**

**NAM1-40-P-X**

X: Length in meters

**Examples:**

To order a NAM1-40-P RF cable armor, 0.5 meter, specify NAM1-40-P-0.5.