


**NAM1-62-P**  
Long Flex Life

Features:  
\* Long Flex Life  
\* High Durable

Applications:  
\* Laboratory Test  
\* Satellite Communication

**Construction**

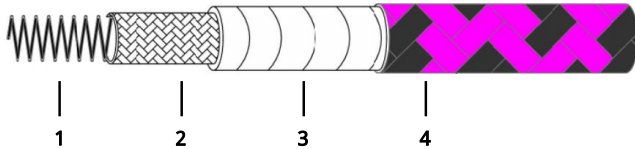

No.	Name	Size (mm)	Material
1	Spring	6.9±0.1	Stainless Steel Strap
2	Outer Conductor	7.5±0.1	Tin Plated Braid
3	Inner Jacket	7.75±0.1	PTFE
4	Jacket	8.25±0.15	PTFE

**Environmental**

Temperature: -40~+165°C  
Water Proof: No  
Oil Proof: No

**Mechanical**

Bend Radius (installation): 30mm  
Bend Radius (repeated): 80mm  
Spring Spiral Direction: Right  
Spring Zero Load Pitch: 0.75~1.0mm  
Spring Wire Size: 2.0\*0.4mm  
Spring Inner Diameter: 6.20±0.1mm  
Outer Conductor Coverage Rate: 90% min.  
Inner Jacket Color: White  
Jacket Color: Purple and Black

**How To Order**

**NAM1-62-P-X**

X: Length in meters

Examples:

To order a NAM1-62-P RF cable armor, 0.5 meter, specify NAM1-62-P-0.5.