


NAM1-62-P

Long Flex Life

Features:
 * Long Flex Life
 * High Durable

Applications:
 * Laboratory Test
 * Satellite Communication

Construction

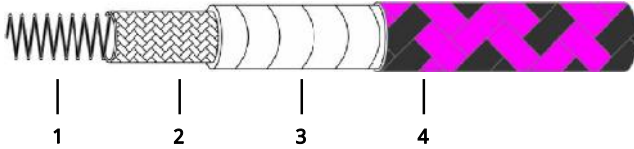

No.	Name	Size (mm)	Material
1	Spring	6.9±0.1	Stainless Steel Strap
2	Outer Conductor	7.5±0.1	Tin Plated Braid
3	Inner Jacket	7.75±0.1	PTFE
4	Jacket	8.25±0.15	PTFE

Environmental

Temperature: -40~+165°C
 Water Proof: No
 Oil Proof: No

Mechanical

Bend Radius (installation): 30mm
 Bend Radius (repeated): 80mm
 Spring Spiral Direction: Right
 Spring Zero Load Pitch: 0.75~1.0mm
 Spring Wire Size: 2.0*0.4mm
 Spring Inner Diameter: 6.20±0.1mm
 Outer Conductor Coverage Rate: 90% min.
 Inner Jacket Color: White
 Jacket Color: Purple and Black

How To Order

NAM1-62-P-X
 X: Length in meters

Examples:

To order a NAM1-62-P RF cable armor, 0.5 meter, specify NAM1-62-P-0.5.