

NY635

Outdoor Use, Low Loss, Phase Stable

Features:

- * Low Insertion Loss
- * High Weatherability
- * UV Resistant

Applications:

- * Wireless Base Station
- * Satellite Communication
- * Maritime Communication
- * Outdoor Interconnection

Electrical

Frequency:	DC~18GHz
Cut-off Frequency:	27GHz
Impedance:	50Ω
Velocity of Propagation:	76%
Shielding Effectiveness:	70dB min.
Voltage Withstand:	2000V DC


Mechanical

Bend Radius (installation):	36.0mm
Bend Radius (repeated):	72.0mm
Weight:	89g/m

Environmental

Temperature:	-55~+85°C
Outdoor Life:	20 years

Construction

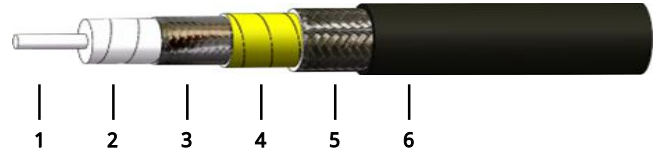

No.	Name	Size (mm)	Material
1	Inner Conductor	1.57	Silver-plated copper
2	Dielectric	4.72	Low density PTFE
3	Inner Shield	4.96	Silver-plated copper tape
4	Interlayer	5.10	Aluminum tape
5	Outer Shield	5.66	Silver-plated copper braid
6	Jacket	7.20	PUR

Attenuation & Power Handling

Frequency (GHz)	0.1	0.3	0.5	1	3	6	10	12.4	18
Attenuation*1 (dB/100m)	6.9	12.0	15.6	22.2	39.2	56.4	74.2	83.4	102.2
Average Power*2 (W)	1150	660	509	357	202	140	107	95	77

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = 0.682743 * √F (MHz) + 0.000591 * F (MHz)

Calculate Connector Attenuation: Attenuation (dB) = 0.03 * √F (GHz)

How To Order

NY635-X-Y-Z

- X: Frequency in GHz
- Y: Connector type
- Z: Length in meters

Examples:

To order a NY635 cable assembly, DC-18GHz, N male to SMA female, 1.5 meters, specify NY635-18-SFN-1.5.

Connector naming rules:

- S - SMA (18GHz, VSWR 1.25)
- N - N (18GHz, VSWR 1.25)
- T - TNC (18GHz, VSWR 1.25)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)