

NZ600 Ultra-Flexible

- | | |
|--|---|
| Features:
* Ultra-Flexible
* Corrosion Resistance | Applications:
* Phased-array Radar
* Laboratory Test
* Small & Complicated Interconnection Occasion |
|--|---|

Electrical

Frequency:	DC~26.5GHz
Cut-off Frequency:	29.5GHz
Impedance:	50Ω
Velocity of Propagation:	76%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	1700V DC
Phase Stable:	550PPM
Mechanical Phase Stable:	±3°
Amplitude Stability:	±0.1dB


Mechanical

Bend Radius (installation):	25.0mm
Bend Radius (repeated):	60.0mm
Weight:	82g/m

Environmental

Temperature:	-55~+85°C
--------------	-----------

Construction

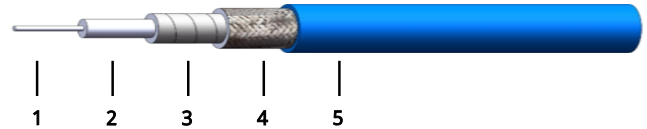

No.	Name	Size (mm)	Material
1	Inner Conductor	1.44	Stranded Silver-plated copper
2	Dielectric	4.25	Low density PTFE
3	Inner Shield	4.45	Silver-plated copper tape
4	Outer Shield	4.90	Silver-plated copper braid
5	Jacket	5.90	PUR

Attenuation & Power Handling

Frequency (GHz)	1	2	4	6	8	10	12.4	18	26.5
Attenuation*1 (dB/100m)	28.7	41.2	59.3	73.6	86.0	97.1	109.2	134.3	167.2
Average Power*2 (W)	175	122	85	68	59	52	46	37	30

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = 0.880600 * √F (MHz) + 0.000900 * F (MHz)

Calculate Connector Attenuation: Attenuation (dB) = 0.03 * √F (GHz)

How To Order

NZ600-X-Y-Z

- X: Frequency in GHz
 Y: Connector type
 Z: Length in meters

Examples:

To order a NZ600 cable assembly, DC-18GHz, SMA male to SMA female, 0.5 meter, specify NZ600-18-SSF-0.5.

Connector naming rules:

- 3 - 3.5mm (26.5GHz, VSWR 1.3)
- S - SMA (26.5GHz, VSWR 1.3)
- N - N (18GHz, VSWR 1.25)
- T - TNC (18GHz, VSWR 1.25)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)

Mating Connector

NCS-MG-Z600-1

SMA male, Stainless steel

NCS-FHG-Z600-1

SMA female, Bulk head,
Stainless steel

NCN-MRG-Z600-1

N male, Right angle,
Stainless steel

NCT-MG-Z600-1

TNC male, Stainless steel

NCS-MRG-Z600-1

SMA male, Right angle,
Stainless steel

NCN-MG-Z600-1

N male, Stainless steel

NCN-FG-Z600-1

N female, Stainless steel

NCT-MRG-Z600-1

TNCmale, Right angle,
Stainless steel
