

RG178

Low Cost

Features:
* Low Cost

Applications:
* Telecom
* Interconnect between equipment

Electrical

Frequency:	DC-6GHz
Impedance:	50±2Ω
Velocity of Propagation:	70%
VSWR:	1.30 max.@DC-6GHz
Voltage Withstand:	1000V DC
Capacitance:	96pF/m


Mechanical

Bend Radius(installation):	10mm min.
Bend Radius(repeated):	40mm min.

Environmental

Temperature:	-55~+200°C
--------------	------------

Construction

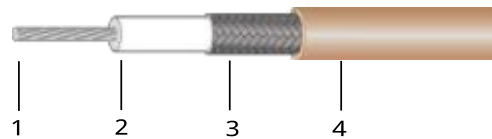

No.	Name	Size (mm)	Material
1	Inner Conductor	0.3	Silverplated copper Wire
2	Dielectric	0.9	PTFE
3	Outer Conductor	1.3	Silverplated copper Wire
4	Jacket	1.8	FEP

Attenuation

Frequency (GHz)	0.1	0.4	1	2	3	4	5	6
Attenuation(dB/100m)	52	120	170	242	308	363	415	480

Calculate Cable Attenuation: Attenuation (dB/100m) = 2.577759 * √F (MHz) + 0.004024 * F (MHz)

Calculate Connector Attenuation: Attenuation (dB) = 0.03 * √F (GHz)

How To Order

RG178-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a RG178 cable assembly, DC-3GHz, SMA male to SMA female, 0.8 meter, specify RG178-3-SSF-0.8.

Connector naming rules:

S - SMA (6GHz, VSWR 1.4)

X - MMCX (6GHz, VSWR 1.4)

M - MCX (6GHz, VSWR 1.4)

B - BNC (4GHz, VSWR 1.4)

D - SMB (4GHz, VSWR 1.4)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)