

NA22

2.4mm to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~50GHz
VSWR: 1.2 max.
Impedance: 50Ω



Mechanical

RF Connectors: 2.4mm
Mating Life Cycle: 2000 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper


Environmental

Temperature: -60~+165°C

Outline Drawings

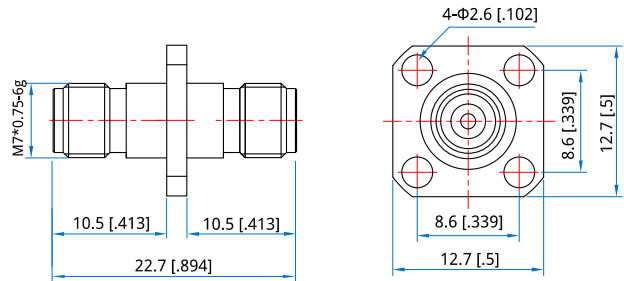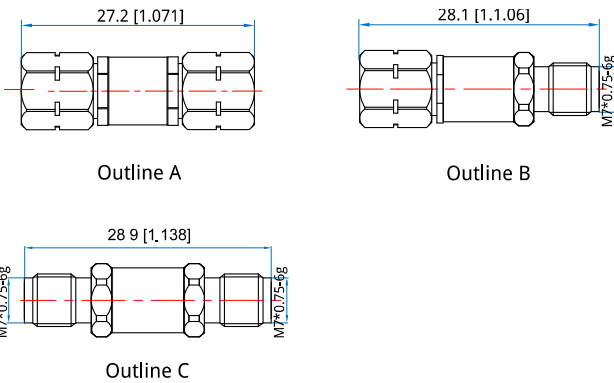

Outline D

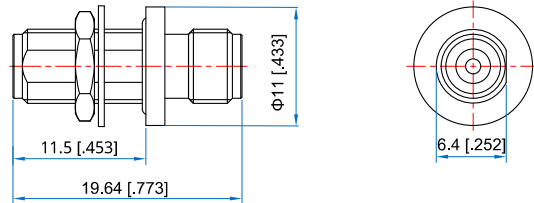

Outline E

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NA22-MM - 2.4mm(m) to 2.4mm(m), Outline A
- NA22-MF - 2.4mm(m) to 2.4mm(f), Outline B
- NA22-FF - 2.4mm(f) to 2.4mm(f), Outline C
- NA22L-FF - 2.4mm(f) to 2.4mm(f) flange mount, Outline D
- NA22H-FF - 2.4mm(f) to 2.4mm(f) bulkhead, Outline E

Customization is available upon request.