

NA22

2.4mm to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC-50GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 2.4mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper or gold plated brass

How To Order


NA22-MM - 2.4mm(m) to 2.4mm(m), Outline A
NA22-MF - 2.4mm(m) to 2.4mm(f), Outline B
NA22-FF - 2.4mm(f) to 2.4mm(f), Outline C
NA22R-MM - 2.4mm(m) to 2.4mm(m), right angle, Outline D
NA22R-MF - 2.4mm(m) to 2.4mm(f), right angle, Outline E
NA22R-FF - 2.4mm(f) to 2.4mm(f), right angle, Outline F
NA22L-FF - 2.4mm(f) to 2.4mm(f), flange mount, Outline G
NA22H-FF - 2.4mm(f) to 2.4mm(f), bulk head, Outline H

Customization is available upon request.

Environmental

Temperature: -60~+165°C

Outline Drawings

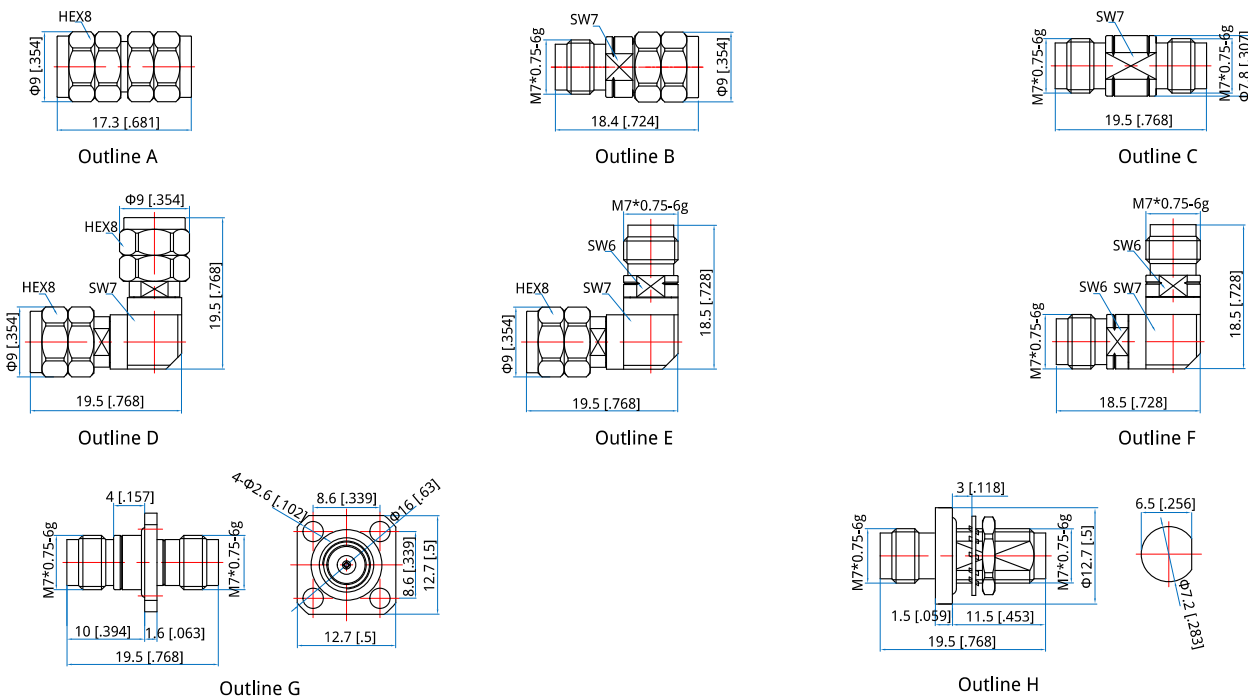

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]