

NA2K

2.4mm to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~40GHz
VSWR: 1.15 max.
Impedance: 50Ω


Mechanical

RF Connectors: 2.4mm,
2.92mm
Mating Life Cycle: 2000 cycles
Outer Conductor: SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -60~+165°C

Outline Drawings

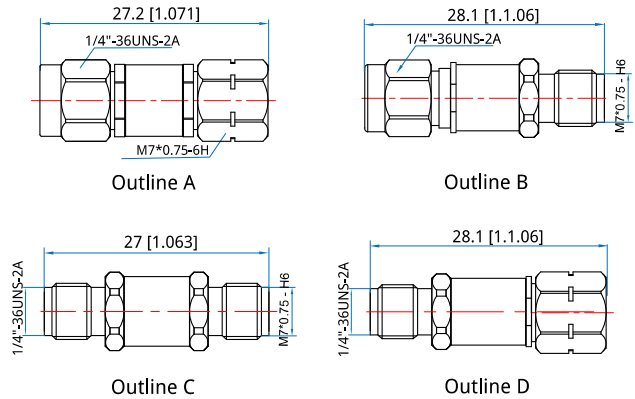

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NA2K-MM** - 2.4mm (m) to 2.92mm (m), Outline A
- NA2K-FM** - 2.4mm (f) to 2.92mm (m), Outline B
- NA2K-FF** - 2.4mm (f) to 2.92mm (f), Outline C
- NA2K-MF** - 2.4mm (m) to 2.92mm (f), Outline D

Customization is available upon request.