

NA2P

2.4mm to SMP

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~40GHz
VSWR: 1.5 max.
Impedance: 50Ω


Mechanical

RF Connectors: 2.4mm
SMP
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -50~+85°C

Outline Drawings

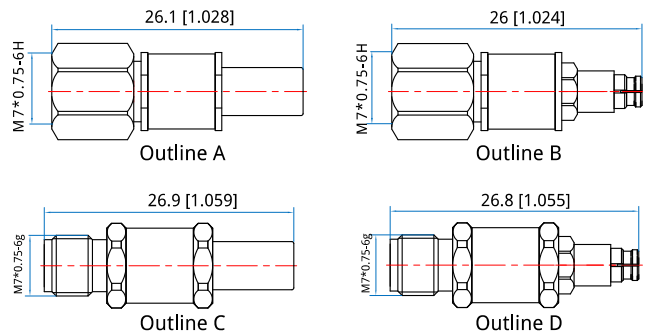

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NA2P-MM - 2.4mm (m) to SMP (m), Outline A

NA2P-MF - 2.4mm (m) to SMP (f), Outline B

NA2P-FM - 2.4mm (f) to SMP (m), Outline C

NA2P-FF - 2.4mm (f) to SMP (f), Outline D

Customization is available upon request.