

**NA3S**  
3.5mm to SMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency: DC~27GHz  
VSWR: 1.15 max.  
Impedance: 50Ω

**Mechanical**


RF Connectors: 3.5mm SMA  
Outer Conductor: Polished & passivated SU303F stainless steel  
Dielectric: PEI or PTFE  
Inner Conductor: Gold plated beryllium copper

**How To Order**

- NA3S-MM** - 3.5mm (m) to SMA (m), Outline A
- NA3S-FF** - 3.5mm (f) to SMA (f), Outline B
- NA3S-MF** - 3.5mm (m) to SMA (f), Outline C
- NA3S-FM** - 3.5mm (f) to SMA (m), Outline D

Customization is available upon request.

**Outline Drawings**

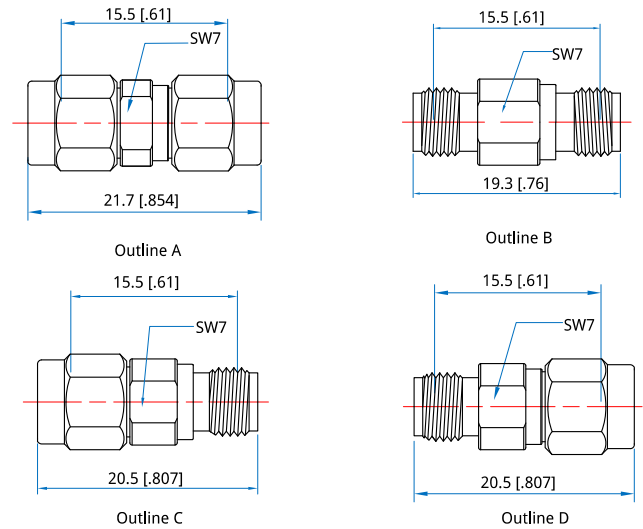

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]