

### NAAA SSMA to SSMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

#### Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max. 1.2 max. (flange mount)
Voltage Withstand:	1000V DC
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω

#### Mechanical

RF Connectors:	SSMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

#### Environmental

Temperature: -55~+165°C

#### How To Order

**NAAA-MM** - SSMA(m) to SSMA(m), Outline A


**NAAA-FF** - SSMA(f) to SSMA(f), Outline B

**NAAA-MF** - SSMA(m) to SSMA(f), Outline C

**NAAAL-FF** - SSMA(f) to SSMA(f), Flange mount, Outline D

Customization is available upon request.

#### Outline Drawings

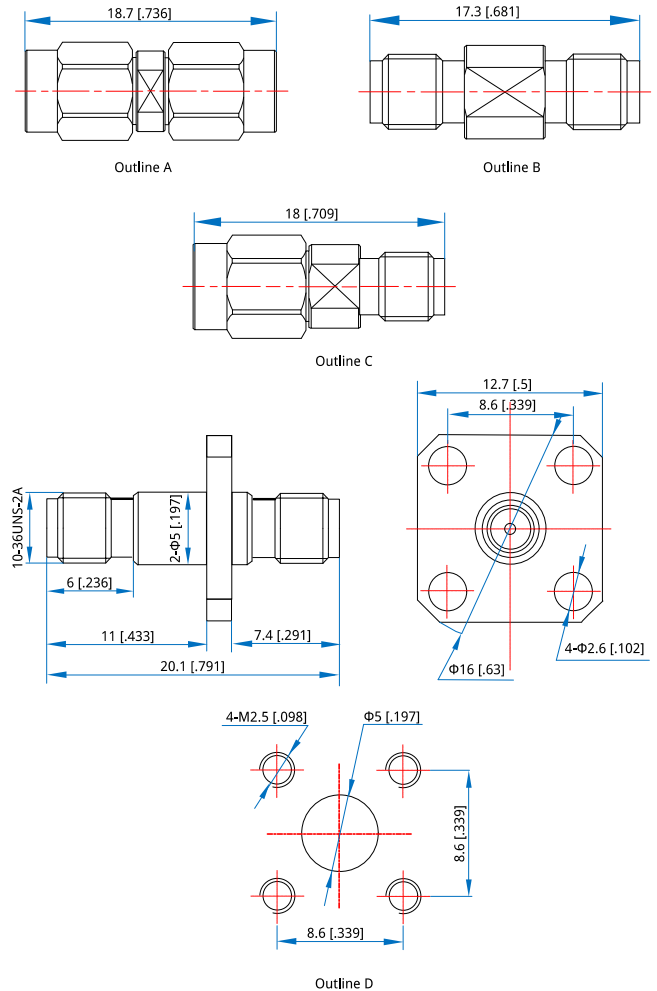

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]