


NAAS SSMA to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

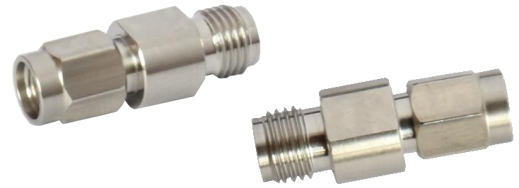

Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Insertion Loss: 0.3dB max.
Impedance: 50Ω


Mechanical

RF Connectors: SSMA
SMA
Mating Life Cycle: 2000 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+85°C

Outline Drawings

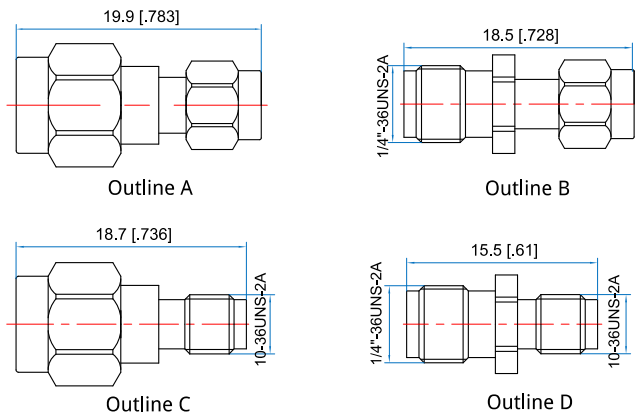

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NAAS-MM - SSMA (m) to SMA (m), Outline A

NAAS-MF - SSMA (m) to SMA (f), Outline B

NAAS-FM - SSMA (f) to SMA (m), Outline C

NAAS-FF - SSMA (f) to SMA (f), Outline D

Customization is available upon request.