

### NAAS SSMA to SMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

#### Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750Vrms
Insertion loss:	0.05dB max.
Impedance:	50Ω


#### Mechanical

RF Connectors:	SSMA SMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

#### Environmental

Temperature:	-60~+165°C
--------------	------------

#### Outline Drawings

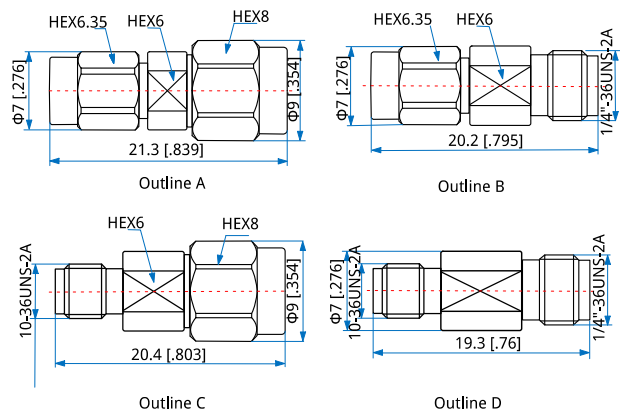

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**NAAS-MM** - SSMA(m) to SMA(m), Outline A

**NAAS-MF** - SSMA(m) to SMA(f), Outline B

**NAAS-FM** - SSMA(f) to SMA(m), Outline C

**NAAS-FF** - SSMA(f) to SMA(f), Outline D

Customization is available upon request.