

NABM4

BNC to MHV

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

| | |
|----------------------------------|-------------------------------------|
| Frequency: | DC~0.3GHz |
| Dielectric Withstanding Voltage: | 1500V RMS, 50Hz, at sea level, min. |
| Impedance of Dielectric: | 5000MΩ min. |
| Impedance of Contact (Center): | 2mΩ max. |
| Impedance of Contact (Outer): | 1mΩ max. |
| Impedance: | 50Ω |


Mechanical

| | |
|--------------------|---------------------|
| RF Connectors: | BNC MHV |
| Mating Life Cycle: | 500 cycles min. |
| Outer Conductor: | Nickel plated brass |
| Dielectric: | PTFE |
| Inner Conductor: | Gold plated brass |

Environmental

| | |
|--------------|------------|
| Temperature: | -45~+125°C |
|--------------|------------|

Outline Drawings

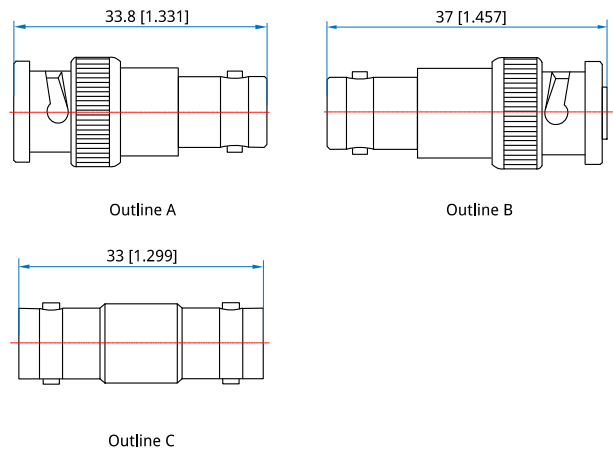

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NABM4-MF** - BNC (m) to MHV (f), Outline A
- NABM4-FM** - BNC (f) to MHV (m), Outline B
- NABM4-FF** - BNC (f) to MHV (f), Outline C

Customization is available upon request.