

NAGK SSMP to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~40GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: SSMP
2.92mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -60~+165°C

Outline Drawings

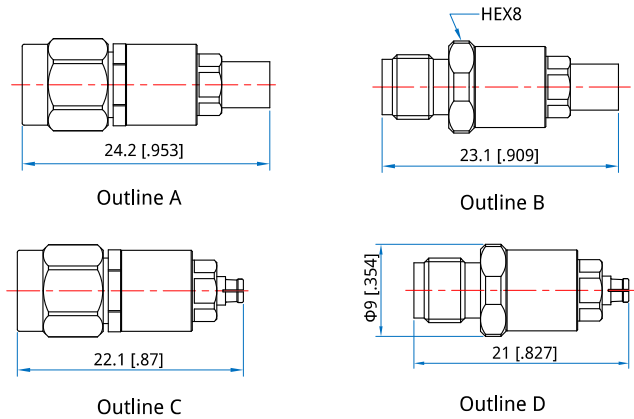

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NAGK-MM - SSMP (m) to 2.92mm (m), Outline A

NAGK-MF - SSMP (m) to 2.92mm (f), Outline B

NAGK-FM - SSMP (f) to 2.92mm (m), Outline C

NAGK-FF - SSMP (f) to 2.92mm (f), Outline D

Customization is available upon request.