

NAGS SSMP to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~26.5GHz
DC~18GHz (bulk head)
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: SSMP
SMA
Outer Conductor: Passivated Stainless Steel or
Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+125°C


How To Order

- NAGS-FM** - SSMP(f) to SMA(m), Outline A
- NAGS-MM** - SSMP(m) to SMA(m), Outline B
- NAGS-FF** - SSMP(f) to SMA(f), Outline C
- NAGS-MF** - SSMP(m) to SMA(f), Outline D
- NAGSH-FF** - SSMP(f) to SMA(f), bulk head, Outline E


Customization is available upon request.

Coaxial Adapters


Outline Drawings




Outline A




Outline B



Outline C



Outline D

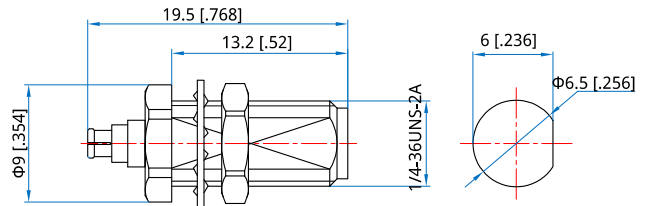

Outline E

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]