

NAKA

2.92mm to SSMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~40GHz
VSWR: 1.2 max.
Insertion Loss: 0.26dB max.
Impedance: 50Ω


Mechanical

RF Connectors: 2.92mm
SSMA
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+125°C

Outline Drawings

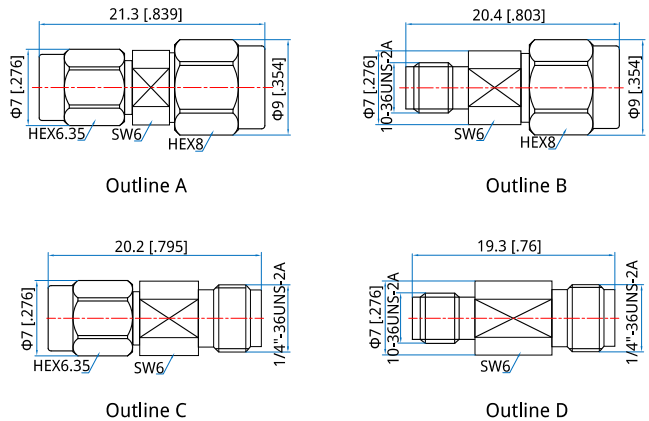

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NAKA-MM** - 2.92mm(m) to SSMA(m), Outline A
- NAKA-MF** - 2.92mm(m) to SSMA(f), Outline B
- NAKA-FM** - 2.92mm(f) to SSMA(m), Outline C
- NAKA-FF** - 2.92mm(f) to SSMA(f), Outline D

Customization is available upon request.