

NAM2K

NMD 2.4mm to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~40GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: NMD 2.4mm
2.92mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

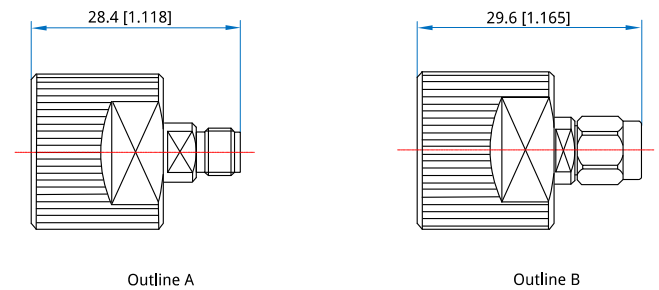

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NAM2K-FF - NMD 2.4mm(f) to 2.92mm(f), Outline A

NAM2K-FM - NMD 2.4mm(f) to 2.92mm(m), Outline B

Customization is available upon request.