Coaxial Adapter

NAM33

NMD 3.5mm to 3.5mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~33GHz
	DC~26.5GHz (Outline D)
VSWR:	1.2 max.
	1.15 max. (Outline D)
Impedance:	50Ω

Mechanical

RF Connectors:	NMD 3.5mm
	3.5mm
Mating Life Cycle:	500 cycles
	3000 cycles min. (Outline D)
Outer Conductor:	Passivated stainless steel
	Gold plated beryllium copper &
	Gold plated brass (Outline D)
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C

Outline Drawings

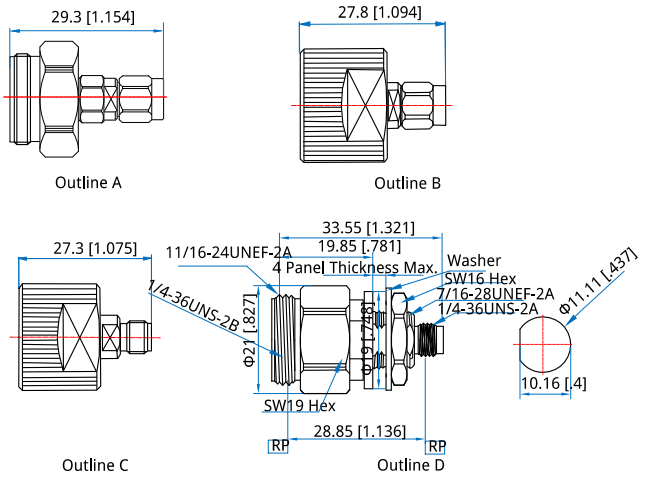

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NAM33-MM - NMD 3.5mm(m) to 3.5mm(m), Outline A
NAM33-FM - NMD 3.5mm(f) to 3.5mm(m), Outline B
NAM33-FF - NMD 3.5mm(f) to 3.5mm(f), Outline C
NAM33H-MF - NMD 3.5mm(m) to 3.5mm(f), bulk head, Outline D

Customization is available upon request.