

# NAM3K

NMD 3.5mm to 2.92mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

## Electrical

Frequency: DC~26.5GHz  
VSWR: 1.15 max.  
Impedance: 50Ω


## Mechanical

RF Connectors: NMD 3.5mm  
2.92mm  
Mating Life Cycle: 2000 cycles min.  
Outer Conductor: Passivated SUS303 stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

## Environmental

Temperature: -55~+165°C

## Outline Drawings

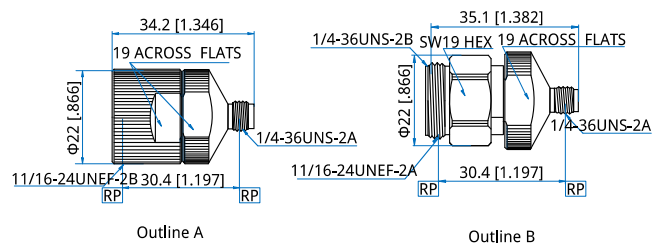

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

## How To Order

**NAM3K-FF** - NMD 3.5mm (f) to 2.92mm (f), Outline A  
**NAM3K-MF** - NMD 3.5mm (m) to 2.92mm (f), Outline B

Customization is available upon request.