

**NAMKV**

NMD 2.92mm to 1.85mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency: DC~40GHz  
VSWR: 1.2 max.  
Impedance: 50Ω


**Mechanical**

RF Connectors: NMD 2.92mm  
1.85mm  
Mating Life Cycle: 2000 cycles min.  
Outer Conductor: Passivated SUS303 stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

**Environmental**

Temperature: -55~+165°C

**Outline Drawings**

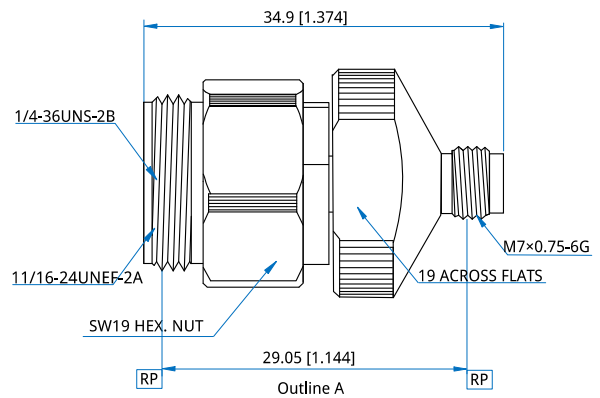

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NAMKV-MF** - NMD 2.92mm (m) to 1.85mm (f), Outline A

Customization is available upon request.