

NAN7

N to 7/16(DIN)

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~6GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: N
7/16(DIN)
Mating Life Cycle: 500 cycles
Outer Conductor: Nickel Plated Brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+125°C

Outline Drawings

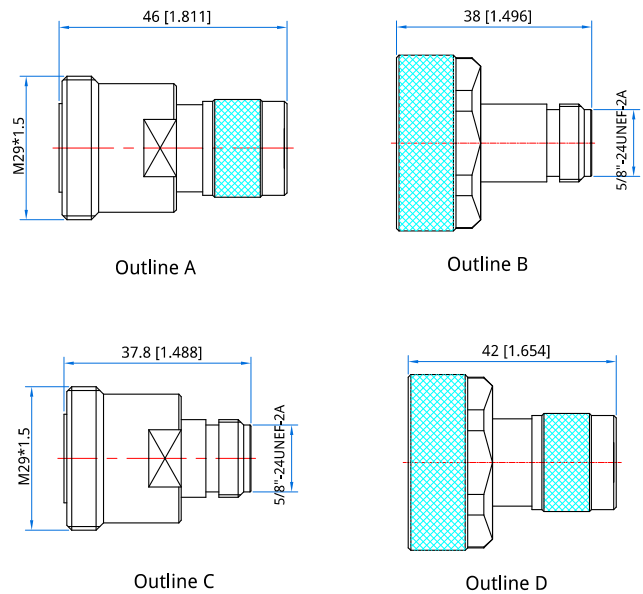

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NAN7-MF - N (m) to 7/16(DIN) (f), Outline A

NAN7-FM - N (f) to 7/16(DIN) (m), Outline B

NAN7-FF - N (f) to 7/16(DIN) (f), Outline C

NAN7-MM - N (m) to 7/16(DIN) (m), Outline D

Customization is available upon request.