

NANE N to SC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~8GHz
VSWR: 1.15 max.
Impedance: 50Ω


Mechanical

RF Connectors: N
SC
Mating Life Cycle: 2000 cycles
Outer Conductor: Passivated SUS303 stainless steel
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

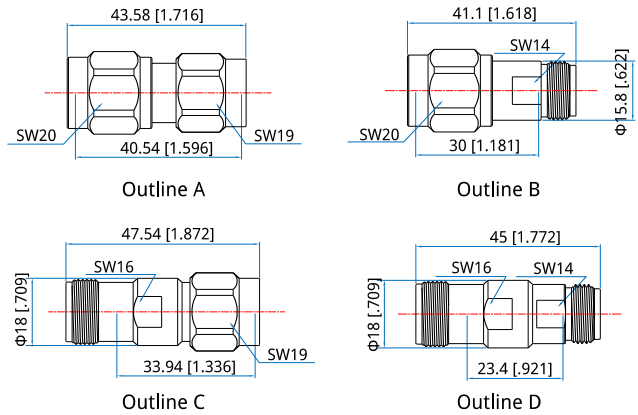

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm} [\pm 0.008\text{in}]$

How To Order

- NANE-MM** - N (m) to SC (m), Outline A
- NANE-FM** - N (f) to SC (m), Outline B
- NANE-MF** - N (m) to SC (f), Outline C
- NANE-FF** - N (f) to SC (f), Outline D

Customization is available upon request.