

**NANL**  
N to L27

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency: DC~6GHz  
VSWR: 1.2 max.  
Impedance: 50Ω


**Mechanical**

RF Connectors: N  
L27  
Mating Life Cycle: 500 cycles  
Outer Conductor: Ternary alloy plated brass  
Dielectric: PTFE  
Inner Conductor: Gold Platedbrass

**Environmental**

Temperature: -45~+85°C

**Outline Drawings**

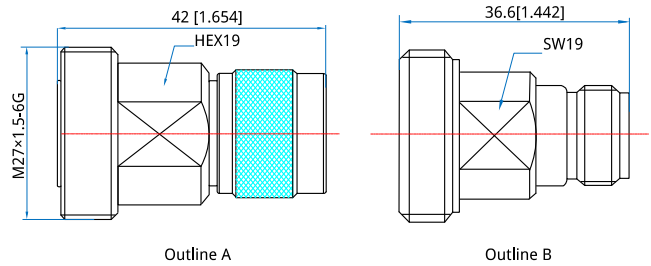

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NANL-MF** - N(m) to L27(f), Outline A

**NANL-FF** - N(f) to L27(f), Outline B

Customization is available upon request.