

NANNEX
N to NEX10

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.1 max.(DC~3GHz)
Impedance: 50Ω

Mechanical

RF Connectors: N
NEX10
Outer Conductor: Ternary alloy plated brass
Dielectric: PTFE
Inner Conductor: Silver plated beryllium copper

Environmental


Temperature: -55~+85°C

How To Order

NANNEX-MF - N(m) to NEX10(f), Outline A

Customization is available upon request.

Outline Drawings

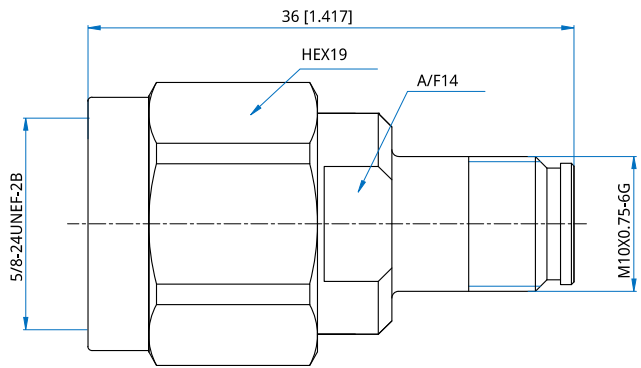

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]