

NASN SMA to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.15 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
N
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI&PTFE
Inner Conductor: Gold plated brass or Gold plated beryllium copper

Environmental

Temperature: -50~+85°C

How To Order

NASN-MM - SMA (m) to N (m), Outline A

NASN-MF - SMA (m) to N (f), Outline B

NASN-FM - SMA (f) to N (m), Outline C

NASN-FF - SMA (f) to N (f), Outline D


NASNL-FF - SMA (f) to N (f) flange mount, Outline E

NASNH-FF-1 - SMA (f) to N (f) bulk head, Outline F

NASNH-FF-2 - SMA (f) to N (f) bulk head, Outline G

Customization is available upon request.

Outline Drawings

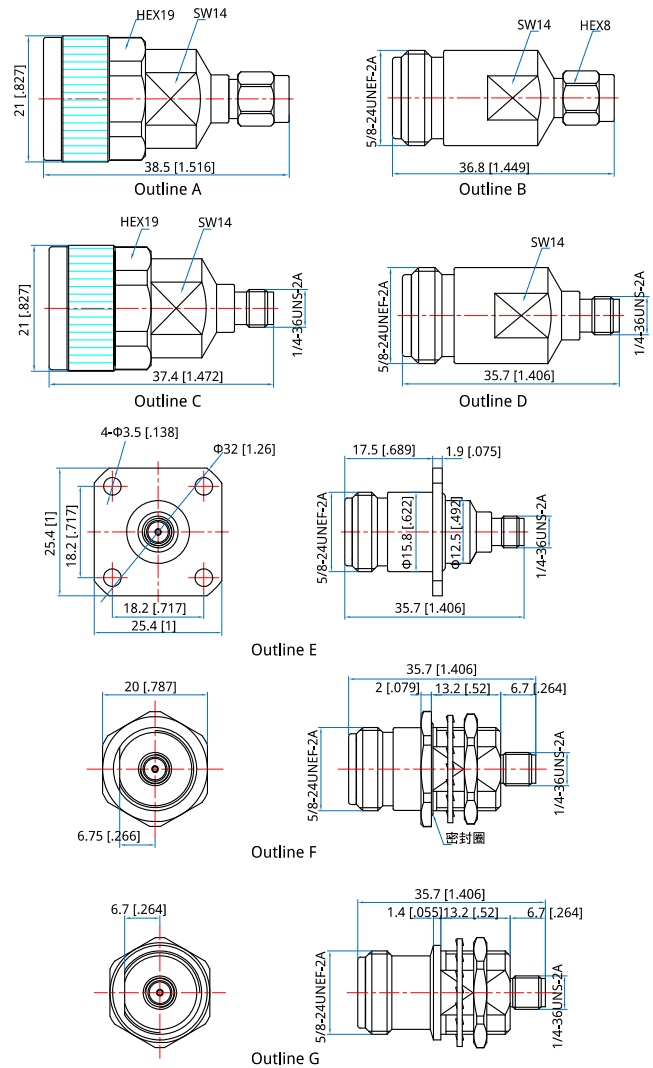

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]