

NASN SMA to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max. 1.3 max. for bulk-head
Insertion Loss:	0.3dB max.
Impedance:	50Ω

Mechanical

RF Connectors:	SMA N
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental


Temperature: -50~+85°C

How To Order

- NASN-MM** - SMA (m) to N (m), Outline A
- NASN-MF** - SMA (m) to N (f), Outline B
- NASN-FM** - SMA (f) to N (m), Outline C
- NASN-FF** - SMA (f) to N (f), Outline D
- NASNL-FF** - SMA (f) to N (f) flange mount, Outline E
- NASNL-FM** - SMA (f) to N (m) flange mount, Outline F
- NASNH-FF** - SMA (f) to N (f) bulk head, Outline G

Customization is available upon request.

Outline Drawings

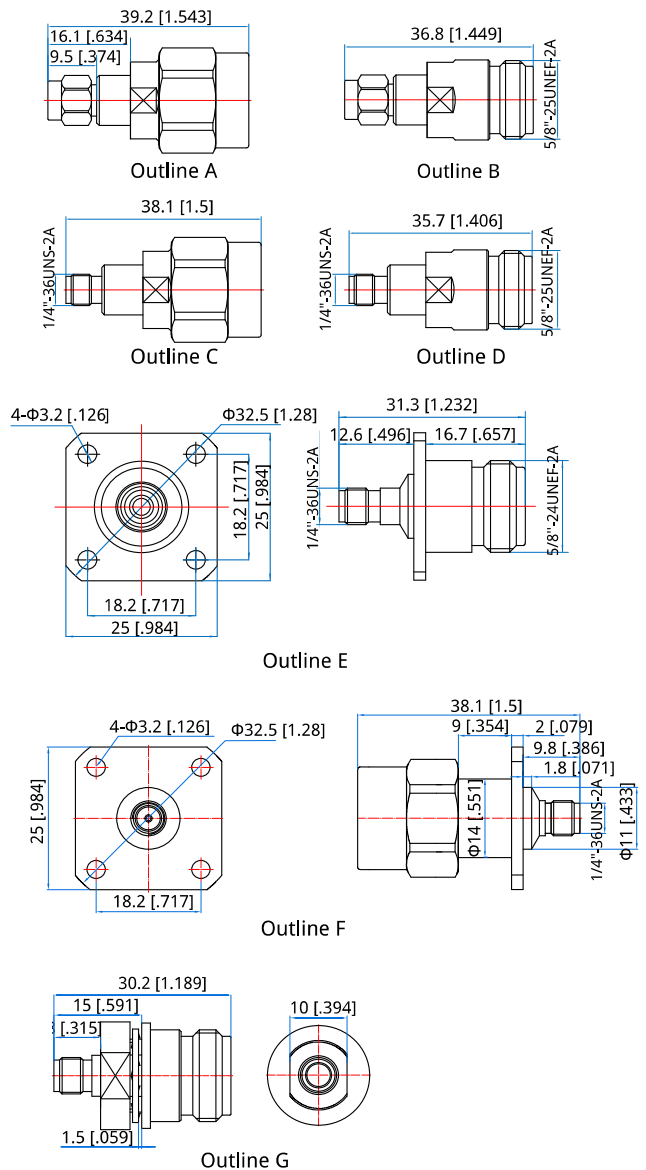

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]